

EXTENSION



- **Safety Shutter**

To prevent electrical shock by incorrect use

- **High efficient brass conductor**

Allows larger current passing through

- **High conductivity silver and copper contact switch**

Induces lower temperature rise

- **Individual power switch**

Reliable and sufficient for 15000 cycles

- **Fire resistant High quality plastic enclosure**

Provides outstanding protection



EXTENSION

Model 1121 Color White / Black
Spec. BS 1363/A



Unfused 13A Rewireable 1 Gang Rubber Socket
+ 2M BS Cable (3Cx1.25) & Plugtop

Model 2122 Color White / Black
Spec. BS 1363/A



Unfused 13A Rewireable 2 Gang Rubber Socket
+ 2M BS Cable (3Cx1.25) & Plugtop

Model 8121 Color White / Black
Spec. BS 1363/A



Unfused 13A Rewireable 1 Gang Rubber Socket
+ 2M BS Cable (3Cx1.25) & Plugtop

Model 2381 Color White
Spec. BS 1363/A



Unfused 13A, Rewireable 1 Gang Extension
Socket + 2M BS Cable (3Cx1.25) & Plugtop

EXTENSION

Model	2381N	Color	/
Spec.	BS 1363/A		



Unfused 13A, Rewireable 1 Gang Extension Socket with Neon Indicator + 2M BS Cable (3Cx1.25) & Plugtop

Model	2382	Color	White
Spec.	BS 1363/A		



Unfused 13A, Rewireable 2 Gang Extension Socket with Neon Indicator + 2M BS Cable (3Cx1.25) & Plugtop

Model	384	Color	White
Spec.	BS 1363/A		



13A Unfused Rewireable 4G Extension Sockets with Neon + 2M BS Cable (3Cx1.25) & Plugtop

Model	386	Color	White
Spec.	BS 1363/A		



Unfused 13A Rewireable 6 Gang Socket with Neon Indicator + 2M BS Cable (3Cx1.25) & Plugtop

EXTENSION

Model 386P Color White
Spec. BS 1363/A



Unfused 13A Rewireable 6 Gang Socket with Neon Indicator + Surge Protection + 2M BS Cable (3Cx1.25) & Plugtop

Model 386S Color White
Spec. BS 1363/A



Unfused 13A Rewireable 6 Gang Extension Socket with Neon Indicator and Main switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 2385F Color White
Spec. BS 1363/A



Fused 13A, Rewireable 4 Gang Extension Socket with Neon Indicator + 2M BS Cable (3Cx1.25) & Plugtop

Model 2385P Color White
Spec. BS 1363/A



Unfused 13A, Rewireable 4 Gang Extension Socket with Neon Indicator + Surge Protection + 2M BS Cable (3Cx1.25) & Plugtop

EXTENSION

Model 2385S Color White
Spec. BS 1363/A



Unfused 13A, Rewireable 4 Gang Extension Socket with Neon Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 2385SF Color White
Spec. BS 1363/A



Fused 13A, Rewireable 4 Gang Extension Socket with Neon Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 2385SP Color White
Spec. BS 1363/A



Unfused 13A, Rewireable 4 Gang Extension Socket with Neon Switch + Surge Protection + 2M BS Cable (3Cx1.25) & Plugtop

Model 7382 Color White
Spec. BS 1363/A



13A 2 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

EXTENSION

Model 7383 Color White
Spec. BS 1363/A



13A 3 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 7384 Color White
Spec. BS 1363/A



13A 4 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 7385 Color White
Spec. BS 1363/A



13A 5 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 7386 Color White
Spec. BS 1363/A



13A 6 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

EXTENSION

Model 7384 Spec. BS 1363/A
Color Metallic-Pink, Metallic-Blue, Champagne



13A 4 Gang Extension Lead with Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 7784 Color Black / Copper
Spec. BS 1363/A



4 x USB Slots 4800mA with 13A 4 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop

Model 8455, 8455P, 8456, 8456P Color White / Black
Spec. BS1363/A



13A 4 Gang Extension Lead With Individual Neon & Switch + 2M BS Cable (3Cx1.25) & Plugtop with

- 8455P : 2A & 1C type USB Port 40W PD3.0 (with Surge Protection)
- 8455 : 2A & 1C type USB Port 40W PD3.0
- 8456 : 1A & 2C type USB Port 65W PD3.0



65W

REAL PD3.0 FASTER CHARGING

USB-C Port x 2


USB-A Port x 1

PD2.0 · PD3.0 & PPS

5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A

USB Implemented with:
PPS(Programmable Power Supply)
Auto Overheat Protection
Auto Overcharge Protection

TOTAL OUTPUT: 65W

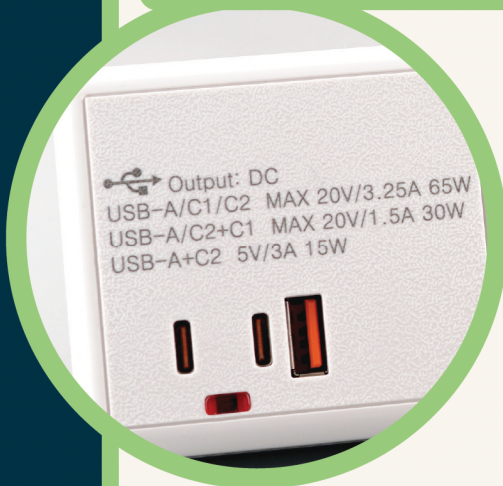

Output: DC
USB-A/C1/C2 MAX 20V/3.25A 65W
USB-A/C2+C1 MAX 20V/1.5A 30W
USB-A+C2 5V/3A 15W

**DIRECTLY
REPLACING**



WK ELECTRICAL



Capable With Macbook Pro / Air

