

WALL WIRING ACCESSORIES



SQUARE EDGE (ANTI-BACTERIAL)



- **Anti-bacterial**
Restrain 99.99% growth of bacteria
- **Low CO₂ emission**
Only 1 tonnes CO₂ emitted from 1 tonnes material
- **Fully bio – degradable**
Contain 46% of nitrogen, Perfect to use as fertilizer
- **Fire Retardant**
Never ever light up by fire
- **Fully independent from oil**
Produce from Natural Gas, Water, Ammonia, Carbon dioxide, Wood
- **Low energy consumption**
50% energy consumption against Injection moulding



SQ



Schuko & French Socket SQ



CONVEX SLIM (ANTI-BACTERIAL)

- **Anti-bacterial**
Restrain 99.99% growth of bacteria
- **Low CO2 emission**
Only 1 tonnes CO2 emitted from 1 tonnes material
- **Low energy consumption**
50% energy consumption against Injection moulding
- **Fully independent from oil**
Produce from Natural Gas, Water, Ammonia, Carbon dioxide, Wood
- **Fully bio – degradable**
Contain 46% of nitrogen, Perfect to use as fertilizer
- **Fire Retardant**
Never ever light up by fire



SM

*Living sustainably in the new era of
environmental consciousness*

* According to scientists featured in the Netflix documentary "Breaking Boundaries" in 2021, we have less than 10 years to change our daily carbon emissions, or else we may face the possibility of a Sixth Mass Extinction.

STEEL CONVEX SLIM

- **Safety Shutter**
To prevent electrical shock by incorrect use
- **High efficient brass conductor**
Allows larger current passing through
- **High conductivity silver and copper contact switch**
Induces lower temperature rise
- **Individual power switch**
Reliable and sufficient for 15000 cycles
- **Fire resistant High quality plastic enclosure**
Provides outstanding protection



SSM

Available in Different Colour Finishing



STEEL CONVEX SLIM



Matt Black BKMC



Copper Brass Finish CBSM



Anthracite Finish ASM/E

Smart Socket



ROUND EDGE CONTEMPORY

- **Safety Shutter**
To prevent electrical shock by incorrect use
- **High efficient brass conductor**
Allows larger current passing through
- **High conductivity silver and copper contact switch**
Induces lower temperature rise
- **Fire resistant High quality plastic enclosure**
Provides outstanding protection
- **Individual power switch**
Reliable and sufficient for 15000 cycles



SMC

STEEL FLAT PLATE

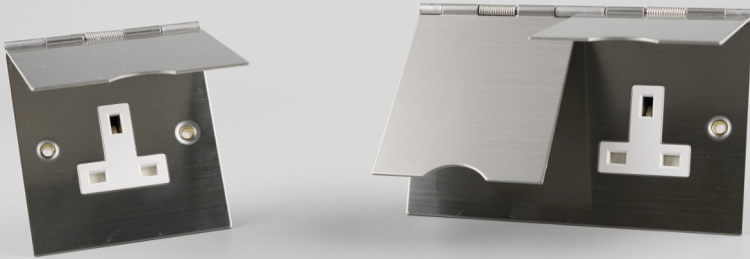
- **Safety Shutter**
To prevent electrical shock by incorrect use
- **High efficient brass conductor**
Allows larger current passing through
- **High conductivity silver and copper contact switch**
Induces lower temperature rise
- **Individual power switch**
Reliable and sufficient for 15000 cycles
- **Fire resistant High quality plastic enclosure**
Provides outstanding protection



SFP

FLOOR SOCKET

- **Safety Shutter**
To prevent electrical shock by incorrect use
- **High efficient brass conductor**
Allows larger current passing through
- **High conductivity silver and copper contact switch**
Induces lower temperature rise
- **Fire resistant High quality plastic enclosure**
Provides outstanding protection
- **Individual power switch**
Reliable and sufficient for 15000 cycles



FS

METAL CLAD

- **Safety Shutter**
To prevent electrical shock by incorrect use
- **High efficient brass conductor**
Allows larger current passing through
- **High conductivity silver and copper contact switch**
Induces lower temperature rise
- **Fire resistant High quality plastic enclosure**
Provides outstanding protection
- **Individual power switch**
Reliable and sufficient for 15000 cycles



MX

SCREWLESS



FC



FC Series

Screwless Products are available in following combination

Steel Cover
Glass Cover
Color Match Plastic Clip Frame
Clear Transparent Plastic Clip Frame

* Covers available in different colors



JC Series

SOCKET with USB Slot



USB Type A (2.4A/3.4A)



USB Type A (QC 3.0) & USB Type C (PD 3.0) - Total : 20W



USB Type A (2.4A)



Schuko & French Socket with USB Type A (QC 3.0) & USB Type C (PD 3.0) - Total : 20W

13A 2Gang Switched USB Socket PD3.0 PPS USB Type A & C



**FIRE
RESISTANT**



**HIGH
CONDUCTIVITY**



**INDIVIDUAL
SWITCH**



**OVERHEATING
PROTECTION**



**HIGH EFFICIENT
BRASS**



SMART CHARGE

Total Output : 20W

USB-A.....QC 3.0

USB-C.....PD 3.0



SAFETY SHUTTER

To prevent electrical shock by incorrect use



PPS

PROGRAMMABLE POWER SUPPLY

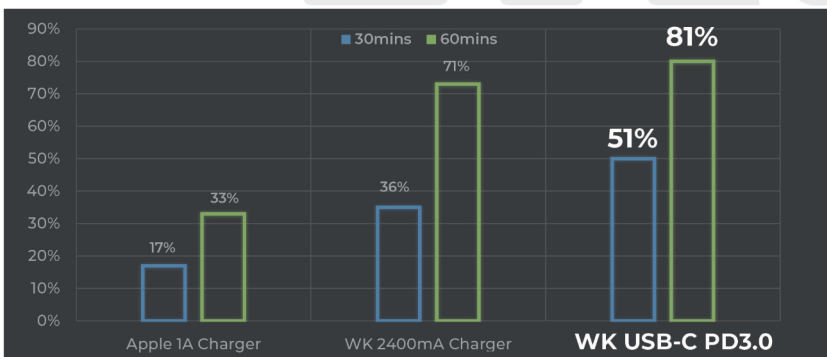
Allows for stepwise changes in current and voltage. It decreases the conversion loss during charging, ensuring the charge is **more efficient**. When the charge is more efficient, **less heat** is produced, and when less heat is produced, a **battery's lifespan increases**.

PPS allows for renegotiation of non-standard currents and voltages between the charger and the device.

PD POWER DELIVERY

WK Power Delivery (PD) allows devices to charge fast over a USB connection. It provides **high-speed charging** with variable voltage using **intelligent device negotiation**. Devices negotiate a power contract to determine how much power they can pull from our charger.

Charging Speed Difference Based on iPhone XR



WALL WIRING ACCESSORIES


Model	Product Name	Specification
681A/1	10AX 1 Gang 1 Way Switch Plate	IEC60669-1
681A/2	10AX 1 Gang 2 Way Switch Plate	IEC60669-1
680A	10AX 1 Gang Bell Switch Plate	IEC60669-1
803	10AX Fan Switch Plate	IEC60669-1
682A	10AX 2 Gang 2 Way Switch Plate	IEC60669-1
83	10AX 3 Gang 2 Way Switch Plate	IEC60669-1
81D	10AX 2 Way Retractive Switch Plate	IEC60669-1
81T	Switch plate 10AX toggle	BSEN 60669-1
88	10AX Intermediate Switch Plate	IEC60669-1
81DP	10AX 1 Gang Wall Switch – D.P.	IEC60669-1
84/DP	20A D.P. 1 Gang Wall Switch Plate – Double Pole	IEC60669-1
84/2	20 AS.P. 1 Gang 2 Way Wall Switch – Single Pole	IEC60669-1
84N	20A D.P. 1 Gang Wall Switch Plate With Neon	IEC60669-1
84K/DP	20A D.P. 1 Gang Secret Key Switch Plate	IEC60669-1
84K/2	20A 1 Gang 2 Way Secret Key Switch Plate	IEC60669-1
913	13A Single Socket Outlet	BS1363
923	13A Twin Socket Outlet	BS1363
913S	13A Single Switched Socket Outlet	BS1363
923S	13A Twin Switched Socket Outlet	BS1363
913DP	13A Single Socket Outlet – Double Pole	BS1363
923DP	13A Twin Socket Outlet – Double Pole	BS1363
93	13A Fused Spur Unit	BS1363-4
93N	13A Fused Spur Unit With Neon	BS1363-4
930	13A Fused Spur Unit With Flex Outlet	BS1363-4
930N	13A Fused Spur Unit With Neon With Flex Outlet	BS1363-4
293	13A Fused & D.P. Switched Spur Unit	BS1363-4
293N	13A Fused & D.P. Switched Spur Unit With Neon	BS1363-4
2930	13A Fused & D.P. Switched Spur Unit With Flex Outlet	BS1363-4
2930N	13A Fused & D.P. Switched Spur Unit With Neon With Flex Outlet	BS1363-4
183	1 Gang Tv Socket	
184	2 Gang Tv Socket	
701P/LED	1 Gang 2 Way Trailing Edge DIMMER (PUSH ON/PUSH OFF) 2-100W LEDs Load / 10-100W Mains Halogen Load	BSEN 60669
702P/LED	2 Gang 2 Way Trailing Edge DIMMER (PUSH ON/PUSH OFF) 2-100W LEDs Load / 10-100W Mains Halogen Load	BSEN 60669
701P/400	1 Gang 2 Way 60/400w Dimmer (Push On/push Off)	
702P/400	2 Gang 2 Way 60/400w Dimmer (Push On/push Off)	IEC 60669-1

Key cover plate types : SQ = Square edge ; FP = Flat plate ; SM = Slim convex ; MC = Round edge ; MX = Metal clad
Metal face plates are available in various decorative plating and decorative coating finishes

WALL WIRING ACCESSORIES

Model	Product Name	Specification
191	20A Connection Plate	
1	Single Mount Blanking Plate	
2	Twin Mount Blanking Plate	
186	45A D.P. 1 Gang Wall Switch	BSEN 60669-1
186N	45A D.P. 1 Gang Wall Switch With Neon	BSEN 60669-1
188	45A D.P. Cooker Switch & 13A Switched Socket	BS4177
188N	45A D.P. Cooker Switch W/neon & 13A Switched Socket	BS4177
286	45A D.P. Rectangular Switch	BSEN 60669-1
286N	45A D.P. Rectangular Switch With Neon	BSEN 60669-1
689	10AX 6 Gang 2 Way Switch Plate	IEC 60669-1
90	10AX 4 Gang 2 Way Switch Plate	IEC 60669-1
7230	Dual Outlet, Dual Voltage 115/230VAC Shaver Socket	EN61558
8523M	2G Unswitched Socket Outlet C/W USB Charger Ports (Combined Output 2400mA)	BS1363
8553	2G Switched Socket Outlet C/W USB Charger Ports (Combined Output 2400mA)	BS1363
8554	2G Switched Socket Outlet C/W USB Charger Ports (USB-A QC3.0 + USB-C PD3.0 - 20W Max.)	BS1363
9554	2G Switched Socket Outlet C/W USB Charger Ports (USB-A QC3.0 + USB-C PD3.0 - 30W Max.)	BS1363
8995	Telephone Socket RJ-11 4 Pin.	
8998	RJ-45 Cat5e Socket – Single	
8975S	15A Switched Socket	BS546
8684	10A 4 Gang 2 Way Switch In 3x3 Plate	IEC 60669-1
8615	10A Universal Socket	
8615S	10A Universal Socket – Switched	
8425	10A 5 Pole Chinese Socket	
8425S	10A 5 Pole Chinese Socket – Switched	
8515/8525	1G Euro Socket / 2G Euro Socket (German)	
8416/8426	1G Euro Socket / 2G Euro Socket (France)	
8561	1G BS 13A Socket Switched And 2 USB (2400mA)	BS1363
8561C	1G switched socket c/w 1A & 1C type USB port 20W P.D	BS1363-2
9561	1G switched socket c/w 1A & 1C type USB port 30W P.D	BS1363-2
8562	1G BS 13A Socket Switched And 2 USB (3400mA)	BS1363
8563	2G BS 13A Socket Switched And 4 USB (4800mA)	BS1363
8448	4 USB Face Plate (4800mA)	EN60950-1
6380	10AX 1G Architrave Bell Switch	IEC 60669-1
6381	10AX 1G Architrave Switch	IEC 60669-1
6382	10AX 2G Architrave Bell Switch	IEC 60669-1





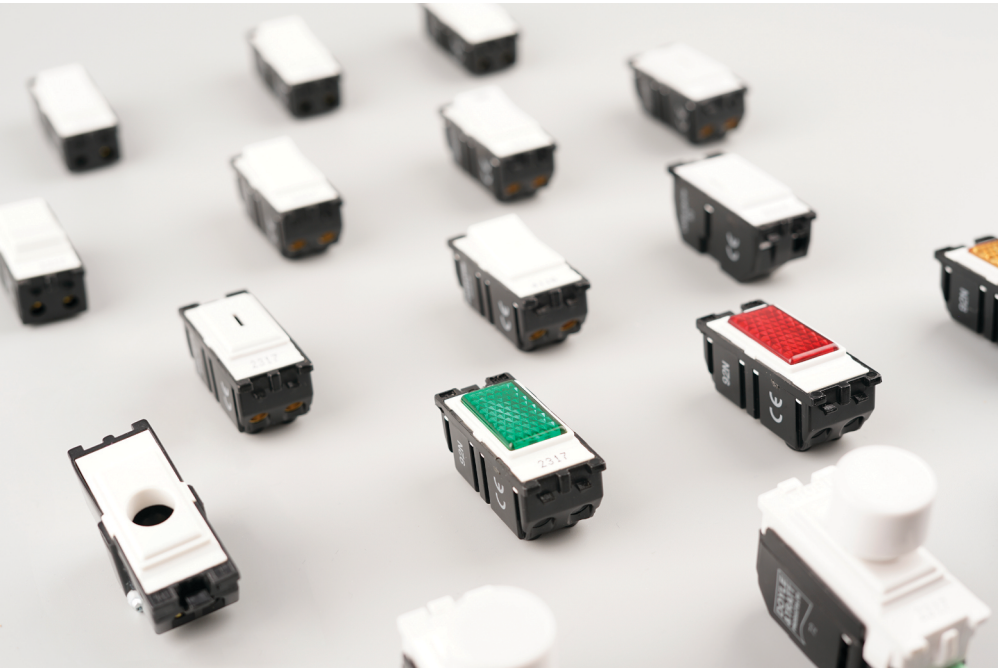
GRID MODULES



GRID PARTS



GRID MODULES

Model	Product Name
G92N	Indicator Module 
G92	Blank Insert Module 
G91	16A Flex Outlet 
G93	13A Fused Connection Unit 
G71	1 Way Dimmer 40/250 Watt 
G72	2 Way Dimmer 60/400 Watt 
G88	Intermediate 10AX Switch 
G81/1	1 Way 10AX Switch 
G81/2	2 Way 10AX Switch 

Model	Product Name
G81D	2 Way Retractive Centre Off Sw 
G81T	GRID switch 10AX toggle 
G84/DP	1 Way DP 20AX Switch 
G84K/DP G84K/2W	1 Way DP 20AX Key Switch 2 Way SP 20AX Key Switch 
G84N	1 Way DP 20AX Switch w/Neon 
G84/2W	2 Way Single Pole 20AX Switch 
GS2H	Grid frames and accessories 
G801	10A single pole bell push (Bell Marking) 
G801/NB	Retractive switch no bell push 

Available with steel covers and various decorative finishes

CONVERSION SOCKET

Model	8533	Color		Spec.	BS1363
-------	------	-------	--	-------	--------



1G/2G To 3G Conversion Switched Socket With Surge Protection and 4USB (4800mA) + 13A Fused
OR 2A + 2C (PD3.0 40W Total) also available

Model	8543	Color		Spec.	BS1363
-------	------	-------	--	-------	--------



1G/2G To 4G Conversion Switched Socket With Surge Protection and 13A Fused

CONVERSION SOCKET

Model	8530	Color		Spec.	BS1363
-------	------	-------	--	-------	--------



1G To 2G Conversion Switched Adaptor and 2USB (2400mA)

Model	8532	Color		Spec.	BS1363
-------	------	-------	--	-------	--------



1G To 2G Conversion Switched Socket and 2USB (2400mA)


CONVERSION SOCKET

Model	8532C	Color		Spec.	BS1363-2
-------	-------	-------	--	-------	----------



1G To 2G Conversion Switched Socket and USB A + C (PD3.0 20W)

Model	8531	Color		Spec.	BS1363
-------	------	-------	--	-------	--------

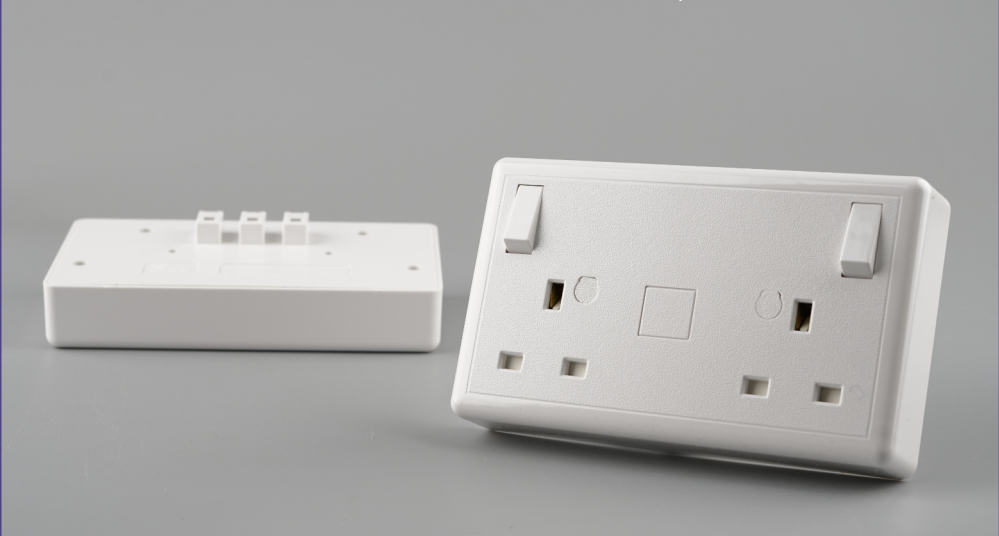

1G To 2G Conversion Switched Socket